


NMF-PC2M4C2-LCU-LCU-

NIKOMAX, MM

50/125 (OM4), LC/UPC-LC/UPC, LSZH, D=2.0



( - )  
 , -  
 ,  
 SC, LC, FC, ST                      UPC  
 (Duplex),                      «                      »                      (Simplex)

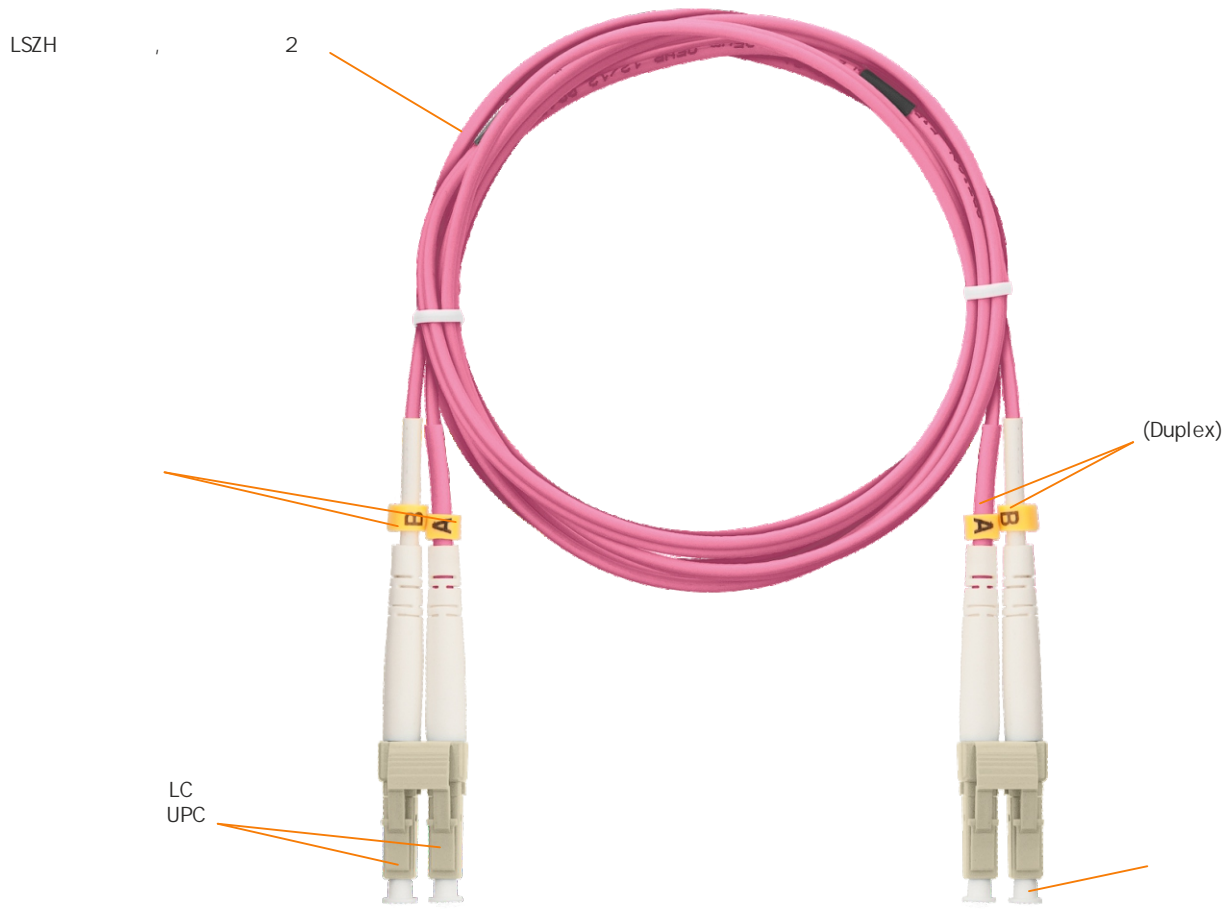

NMF-PC2M4C2-LCU-LCU-xxx

	NMF-PC2M4C2-LCU-LCU-			
	Multi Mode 50/125			
	LC			
	UPC			
	Duplex			
, dB	0,30			
, dB	35			
*, dB	0,20			
	1,25			
	LSZH-			
	2			
	1000			
	ISO/IEC 11801 OM4			
, °C	-20	+65.	-20	+65
	-			
	1			

\*

-

		/			
				, 3	,
NMF-PC2M4C2-LCU-LCU-001		LC/UPC - LC/UPC	1	0,000210	0,010
NMF-PC2M4C2-LCU-LCU-002		LC/UPC - LC/UPC	2	0,000210	0,018
NMF-PC2M4C2-LCU-LCU-003		LC/UPC - LC/UPC	3	0,000210	0,025
NMF-PC2M4C2-LCU-LCU-005		LC/UPC - LC/UPC	5	0,000210	0,036